


NOTES:

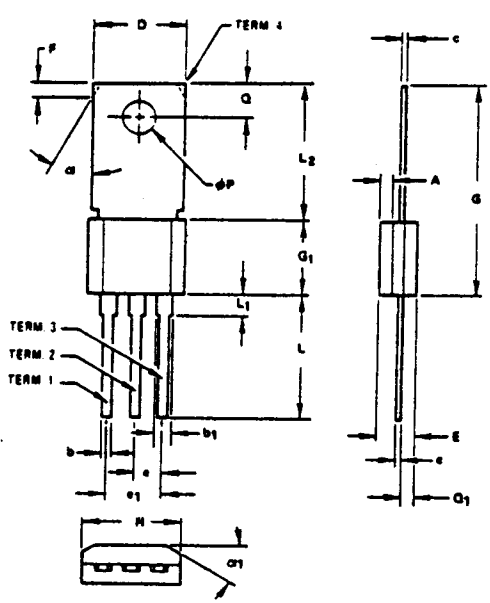

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.
3. CONTOUR OPTIONAL WITHIN DIMENSIONS SPECIFIED.
4. LEAD DIMENSIONS UNCONTROLLED IN THIS ZONE TO ALLOW FOR BODY AND LEAD IRREGULARITIES.
5. CONTROLLING DIMENSIONS: INCH.

VARIATIONS (ALL DIMENSIONS SHOWN IN MILLIMETERS)

SYMBOL	AA		NOTE	AB		NOTE	AC		NOTE	MIN.	MAX.	NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.				
A	-	-		-	1.52	3	-	1.57	3			
B	1.15	1.39		.59	.78		.59	.73				
b ₁	-	-		.89	1.39	3	1.66	2.03				
c	.26	.66		.46	.66		.49	.66				
D	9.15	10.41		6.86	10.41		9.91	10.41				
E	3.05	4.82		3.31	4.82		4.40	4.64				
e	2.42	2.66		2.42	2.66		2.42	2.66				
e ₁	4.83	5.33		4.83	5.33		4.83	5.33				
F	-	-		-	1.77	3	-	1.52	3			
G	-	-		19.31	21.33		21.85	22.35				
G ₁	7.12	8.12		5.85	8.12		7.88	9.14				
H	-	-		8.39	10.66		9.91	10.16				
L	9.43	13.20		9.66	11.43		12.20	12.95				
L ₁	-	2.54	4	1.27	2.54	3,4	1.71	1.95	4			
L ₂	12.20	13.20		-	-		-	-				
∅P	3.13	3.35		3.13	3.35		3.56	3.81				
Q	2.42	3.93		2.93	3.42		3.56	4.06				
Q ₁	1.00	1.93		1.00	1.77		1.07	1.75				
γ	-	-		-	30°	3	-	-	3			
γ ₁	-	-		-	50°	3	-	50°	3			

NOTE 1, 2, 5 1, 2, 5 1, 2, 5


EF.

ISSUE B June 1974 D May 1976 E June 1976

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE TAB MOUNTED FAMILY PERIPHERAL LEADS	ISSUE F	DATE 2/21/78	TO-202
				VARIATION AA - AC

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.
3. CONTOUR OPTIONAL WITHIN DIMENSIONS SPECIFIED.
4. LEAD DIMENSIONS UNCONTROLLED IN THIS ZONE TO ALLOW FOR BODY AND LEAD IRREGULARITIES.
5. CONTROLLING DIMENSIONS: INCH.

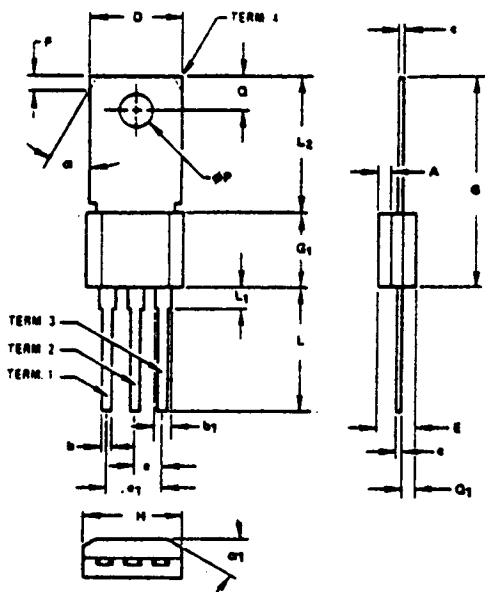

VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)

SYMBOL	AA		NOTE	AB		NOTE	AC		NOTE	MIN.	MAX.	NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.				
A	-	-		-	.060	3	-	.062	3			
b	.045	.055		.023	.031		.023	.029				
b ₁	-	-		.035	.053	3	.065	.080				
c	.010	.026		.018	.026		.019	.026				
D	.360	.410		.270	.410		.390	.410				
E	.120	.190		.130	.190		.173	.183				
e	.095	.105		.095	.105		.095	.105				
e ₁	.190	.210		.190	.210		.190	.210				
F	-	-		-	.070	3	-	.060	3			
G	-	-		.760	.840		.860	.880				
G ₁	.280	.320		.230	.320		.310	.360				
H	-	-		.330	.420		.390	.400				
L	.371	.520		.380	.450		.480	.510				
L ₁	-	.100	4	.050	.100	3,4	.067	.077	4			
L ₂	.480	.520		.123	-		.140	-				
ØP	.123	.132		-	.132		.150	-				
Q	.095	.155		.115	.133		.140	.160				
Q ₁	.039	.076		.039	.070		.042	.069				
α	-	-		-	30°	3	-	-	3			
α ₁	-	-		-	50°	3	-	50°	3			
NOTE	1, 2, 5			1, 2, 5			1, 2, 5					
REF.												
ISSUE	3 June 1974			D May 1976			E June 1976					

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE TAB MOUNTED FAMILY PERIPHERAL LEADS	ISSUE F	DATE 2/21/78	TO-202 VARIATION AA - AC